
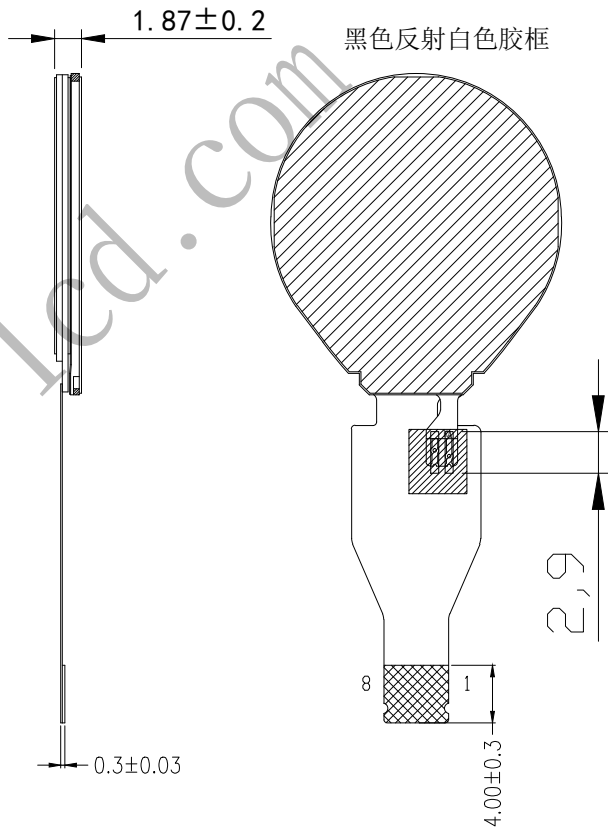


ROSH

Reversion	Discription	Date	Signed
V0	First issue	2025-08-26	FJB

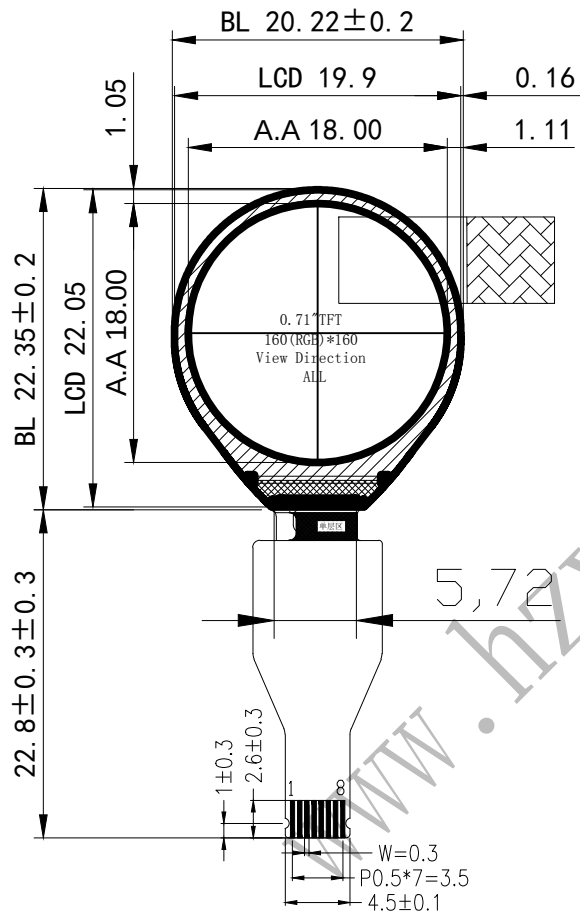

PIN	SYMBOL
1	LEDA
2	GND
3	RESET
4	RS
5	SDA
6	SCL
7	VDD
8	CS

4线SPI

LEDA  LEDK
VF=3.0V(TYP);IF=15-20mA

NOTES:

1. DISPLAY TYPE:0.71" TFT, TRANSMISSIVE Normally Black
2. DRIVER IC:GC9D01N or compatible
3. VIEWING DIRECTION: All
4. BACKLIGHT: 1 pcs White LED
5. BRIGHTNESS: 250cd/m² (typ)
6. INPUT VOLTAGE: VCC 2.8V(typ)
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
10. RoHS COMPLIABLY
11. 建议机壳开窗可视区比LCD A. A区单边大 0.3mm

		深圳市华之洋光电科技有限公司					
		SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD					
Customer Ref.	Model No.		Drawing Title	HZ0071QQPBGWC01N-AA			
Part No.	Approve		Material	Unmarked Tolerance	Unit	Scale	Page
Drawing No.	Checked		LCM	±0.2	mm	--	1 of 1
	Draw	FJB	Date	2025-08-26	Rev 00		