

RoHS

Reversion	Dispcription	Date	Signed
V0	First	2026.08.19	Penglz

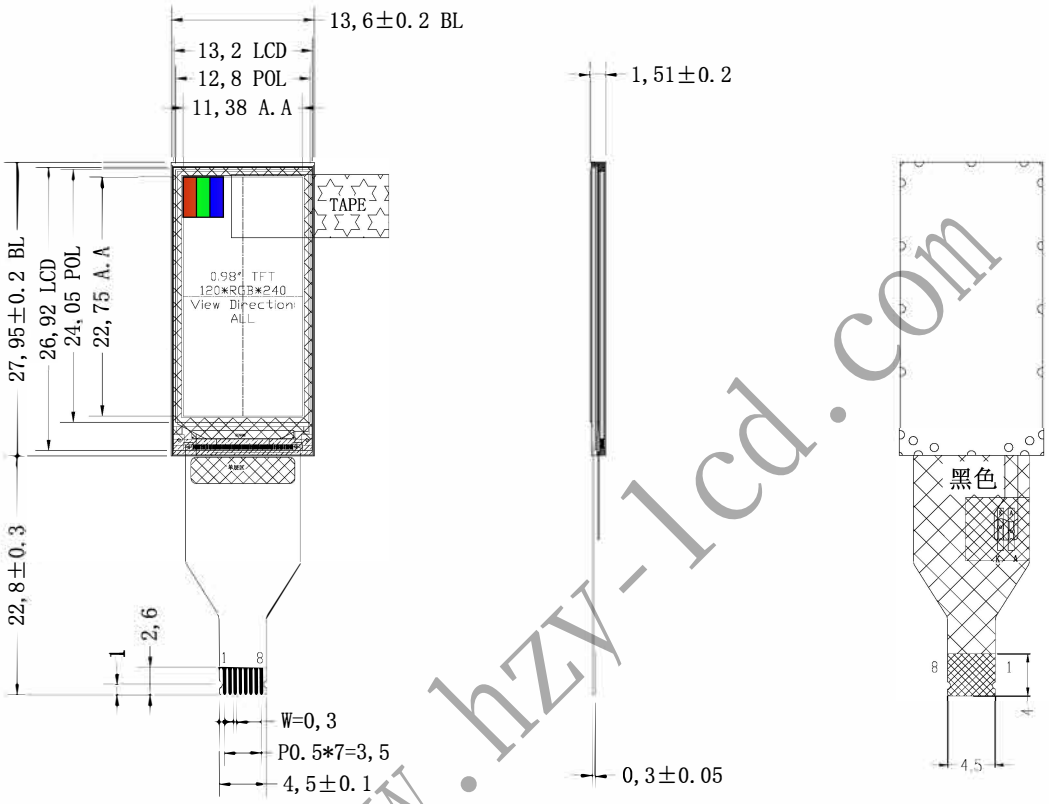



IF=40mA ; VF=2.8~3.2V
LED CIRCUIT DIAGRAM

PIN DESCRIPTION

PIN	SYMBOL
1	LEDA
2	GND
3	RESET
4	RS
5	SDA
6	SCL
7	VDD
8	CS

4-SPI

NOTES:

1. DISPLAY TYPE:0.98″ TFT,TRANSMISSIVE
2. DRIVER IC:SC922 or compatible
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 2 pcs White LED
5. BRIGHTNESS: 600 cd/m2(TYP)
6. INPUT CURRENT: VCC 2.8V(TYP)
7. OPERATING TEMP: -20° C~ +70° C
8. STORAGE TEMP: -30° C~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.3mm
10. RoHS COMPLIABLY
11. 建议机壳开窗可视区比 LCD A.A区单边大 0.3mm

www.hzy-lcd.com

深圳市华之洋光电科技有限公司
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Custumer Ref.	Model No.		Drawing Title	HZ00098QVPMS02-A0			
—	Approve		Material	Unmarked Tolerance	Unit	Scale	Page
Part No.	Checked		LCM	±0.3	mm	—	1 of 1
—	Draw	Penglz	Date	2026.08.19	Rev V0		
Drawing No.							
—							