



ROSH

Reversion	Discription	Date	Signed
01	First		

PIN	SYMBOL
1	LEDK
2	LEDA
3	NC
4	VCI
5	IOVCC
6	RESET
7	TE
8	NC
9	GND
10	DOP
11	DON
12	GND
13	D1P
14	D1N
15	GND
16	CLKP
17	CLKN
18	GND
19	D2P
20	D2N
21	GND
22	D3P
23	D3N
24	GND
25	TP_INT
26	TP_SDA
27	TP_SCL
28	TP_RESET
29	TP_VCI
30	TP_GND

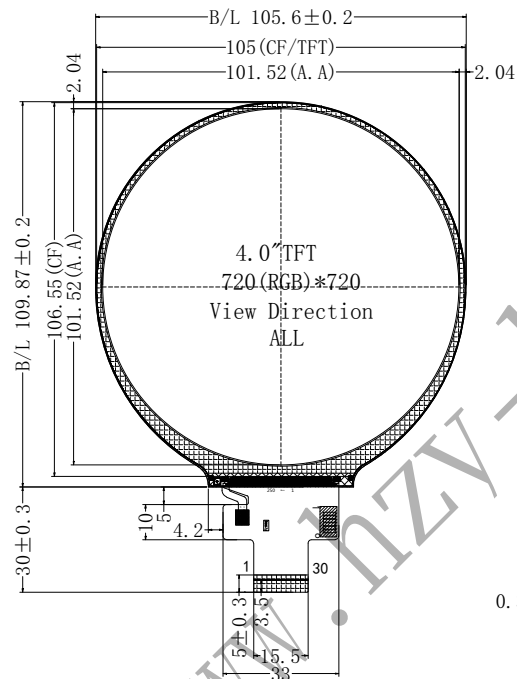

0.3±0.03

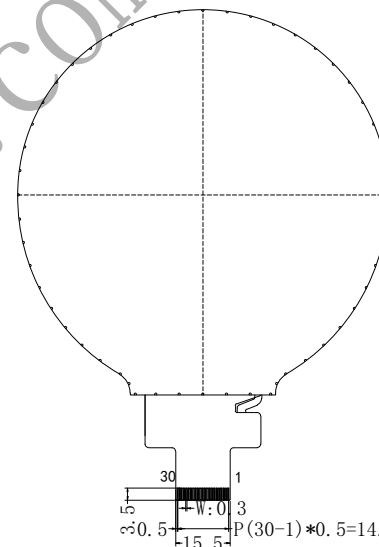

NOTES:

1. DISPLAY TYPE:4.0" TFT, TRANSMISSIVE
2. DRIVER IC:ST7703 OR COMPATIBLE
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 8 pcs White LED
5. BRIGHTNESS: 350MCD/M²
6. INPUT CURRENT: VCC 2.8V(type)
7. OPERATING TEMP: -20° C~ +70° C
8. STORAGE TEMP: -30° C~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
10. RoHS COMPLIABLY



VF:11.6~12.4V; IF=40mA
LED CIRCUIT DIAGRAM

 深圳市华之洋光电科技有限公司 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD							
Customer Ref.	Model No.	DWW	Drawing Title	HZ0400HDPBSWC01N-AA			
Part No.	Approve		Material	Unmarked Tolerance	Unit	Scale	Page
	Checked		LCM	±0.2	mm	--	1 of 1
Drawing No.	Draw		Date	20250905	Rev 00	