


ROHS

Reversion	Discription	Date	Signed
A0	First	2026-01-08	FJB

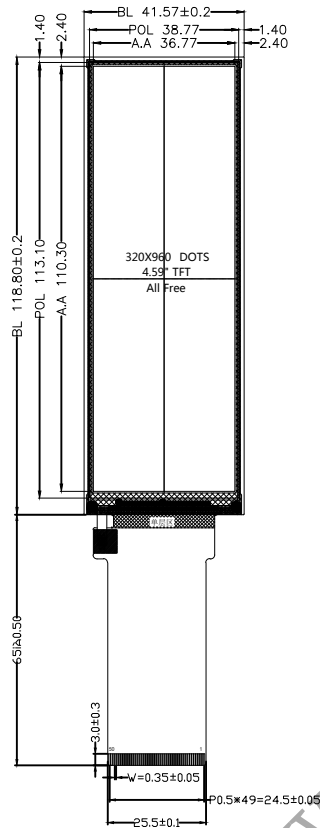


PIN	DESCRIPTION
1	LED K
2	LED A
3	GND
4	MIPI_D0N
5	MIPI_D0P
6	GND
7	MIPI_CLKN
8	MIPI_CLKP
9	GND
10	MIPI_D1N
11	MIPI_D1P
12	GND
13	VSYNC
14	HSYNC
15	DCLK
16	DE
17-24	B0-B7
25-32	G0-G7
33-40	R0-R7
41	RESX
42	CSX
43	SCL
44	SDA
45	SDO
46	IM0
47	IM1
48	IM2
49	10VCC
50	VDD

FPC展开出货

NOTES:

- DISPLAY TYPE:4.59" TFT, TRANSMISSIVE
- DRIVER IC:ST7701P or compatible
- VIEWING DIRECTION: ALL
- BACKLIGHT: 8 pcs White LED
- BRIGHTNESS: 800cd/m2 (TYP)
- INPUT CURRENT: VCC 2.8V (TYP)
- OPERATING TEMP: -20° C~ +70° C
- STORAGE TEMP: -30° C~ +80° C
- UNDEFINED DIMENSION TOLERANCE: ±0.3mm
- RoHS COMPLIABLY
- 建议机壳开窗可视区比LCD A. A区单边大 0.3mm

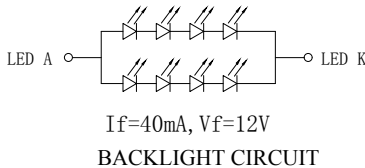

		深圳市华之洋光电科技有限公司					
		SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD					
Customer Ref.	Model No.		Drawing Title	HZ0459QHLBS01-A0			
---	Part No.	Approve	Material	Unmarked Tolerance	Unit	Scale	Page
---	Drawing No.	Checked	LCM	±0.3	mm	--	1 of 1
---	Draw	FJB	Date	2026-01-08	Rev V0	