


ROSH


Reversion	Discription	Date	Signed
V0	First issue	25.08.23	Penglz

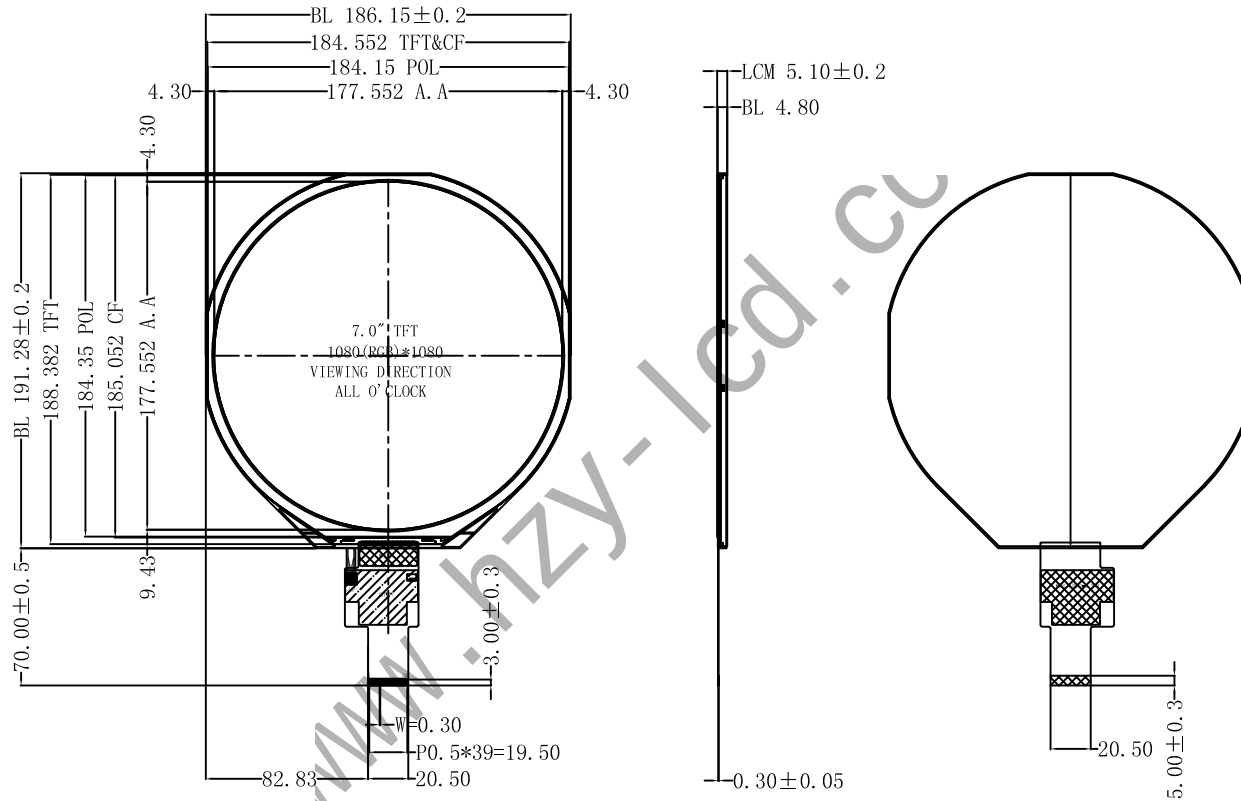

PIN	DESCRIPTION
1	LEDA1
2	LEDA2
3	LEDK1
4	LEDK2
5	VCI
6	VCI
7	GND
8	RESET
9	STBYB
10	GND
11	DO_N/Rin0-
12	DO_P/Rin0+
13	GND
14	D1_N/Rin1-
15	D1_P/Rin1+
16	GND
17	CLK_N/Rclkin-
18	CLK_P/Rclkin+
19	GND
20	D2_N/Rin2-
21	D2_P/Rin2+
22	GND
23	D3_N/Rin3-
24	D3_P/Rin3+
25	GND
26	CS
27	SCL
28	SDA
29	SDO
30	VDD OTP
31	GND
32	TP INT
33	TP SDA
34	TP SCL
35	TP RST
36	TP VCC
37	TP GND
38	NC
39	NC
40	NC

NOTES:

- DISPLAY TYPE: 7" TFT, TRANSMISSIVE Normally Black
- DRIVER IC: FL5893 or compatible
- VIEWING DIRECTION: All
- BACKLIGHT: 14 pcs White LED
- BRIGHTNESS: 500 cd/m² (typ)
- INPUT VOLTAGE: VCC -V (typ)
- OPERATING TEMP: -20° C ~ +70° C
- STORAGE TEMP: -30° C ~ +80° C
- UNDEFINED DIMENSION TOLERANCE: ±0.2mm
- RoHS COMPLIABLE



40PIN MIPI or LVDS

 深圳市华之洋光电科技有限公司 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD							
Customer Ref.	Model No.	Drawing Title		HZ0700FHPTFWS01N-AA			
---	Approve	Material	Unmarked Tolerance	Unit	Scale	Page	
---	Checked	LCM	±0.2	mm	--	1 of 1	
Drawing No.	Draw	Penglz	Date	2025.08.23	Rev 00	