ROSH

Reversion	Dispcription	Date	Signed
A0	First	23.11.18	Carl

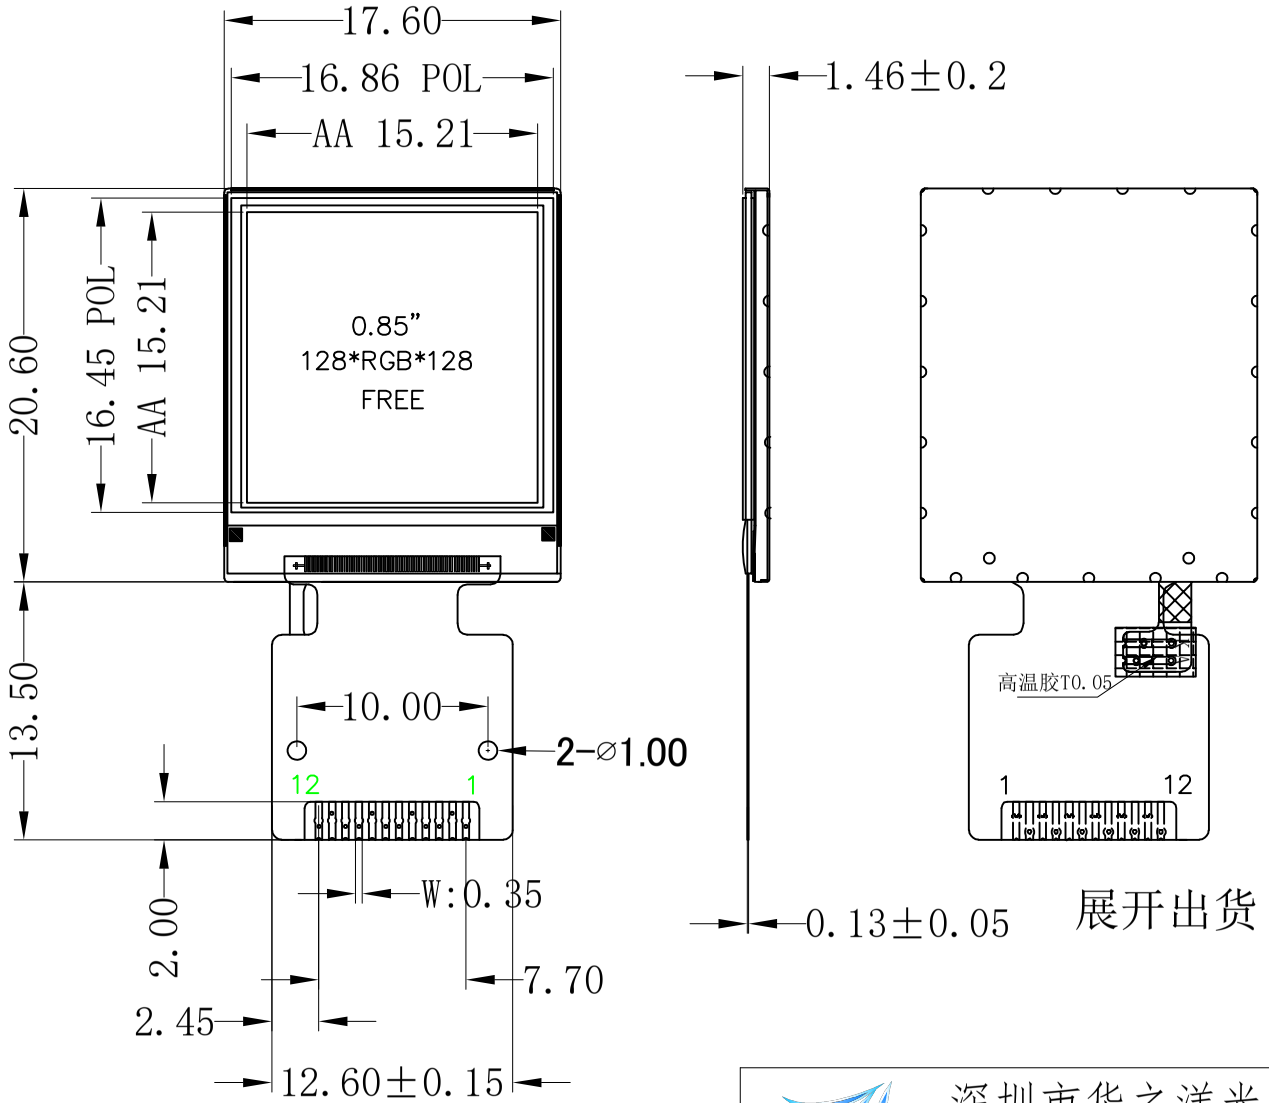

PIN	DESCRIPTION
1	GND
2	LEDK
3	LEDA
4	VDD
5	GND
6	GND
7	D/C
8	CS
9	SCL
10	SDA
11	RESET
12	GND

NOTES:

1. DISPLAY TYPE: 0.85″ TFT
2. VIEWING DIRECTION: All
3. POLARIZER MODE: TRANSMISSIVE/NORMALLY BLACI
4. DRIVER IC: GC9107
5. OPERATING TEMP.: -20°C~70°C
6. STORAGE TEMP.: -30°C~80°C
7. BACK LIGHT: 1 CHIP-WHITE LED; 20MA,3.0V
8. LCM Luminance: 260 CD/M2(TYP)
9. UNMARKED TOLERANCE:±0.2
10. 建议机壳开窗区比 LCD A.A区 大0.3mm
11. 产品符合ROHS标准



VF=3.2V IF=15mA

深圳市华之洋光电科技有限公司

SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Custumer Ref.	Model No.		Drawing Title	HZ085BPBG00-A0			

Part No.	Approve		Material	Unmarked Tolerance	Unit	Scale	Page
---	Checked		LCM	±0.2	mm	--	1 of 1
Drawing No.							
---	Draw	Carl	Date	2023.11.18	Rev 00		